

Updated version !  
The 4 lowest values of  
battery voltage are displayed.

## OPTIONS

### WP-LOGGER

Read and reset stored charger data



Technical data WP-LOGGER	
Battery voltage displayed	0-40,0 V
Max no started charging cycles	0 - 1000 cycles
Max no completed charging cycles	0 - 1000 cycles
Tolerance display	+/- 1 Digit
Internal battery	9 V
Consumption active	8 mA
Consumption auto-off	0,002 mA
Height	25 mm
Width	85 mm
Length	140 mm
Weight	0,3 kg
Art no	290-501

**WP-LOGGER** is an easily used and quick tool for instant information of **TYSTOR WP** charger use. Stored information of the four lowest connected battery voltage, numbers of started charger cycles and numbers of completed charger cycles are all displayed on the logger. Automatic power-off preserve internal battery.

By a smart Reset operation **WP-LOGGER** also empty all counters - making **TYSTOR WP** ready for a new logging period.

Extremely powerful and useful at:

- Fast logging in the field use
- Proactive scheduling of battery replacement
- Supporting users at incorrect use
- Battery reclaims
- Early discovery of nonoptional battery sizes and loads



### Handle & Rubber feet

**TYSTOR WP** will easily be added with carrying handles made in stainless steel. Assembled optional at long side or short side. Fastening screws are included. A 4pcs-kit self-adhesive rubber feets is also available.

Artno: PH0505-188 Handle at long side  
Artno: PH0505-138 Handle at short side

### Brief information about **TYSTOR AB**

The company **TYSTOR AB** is since the past 25 years developing and manufacturing battery chargers.

Markets to be mention are vehicle ( car , truck , bus as electrical vehicle ), forklift , wheelchair and other electrical aids , marine, UPS and also for military use. Custom specific types are made fast and at low costs.

Over 260 000 products has been delivered. The share of export is today approx 55%.

You will find representatives in all Scandinavian countries, Germany, Poland, the Baltic States and also within the rest of the EC-market.

Visit our site at [www.tystor.com](http://www.tystor.com) for detailed information.

Contact us by phone +46 157 70450, fax +46 157 70454 or by email [sales@tystor.com](mailto:sales@tystor.com)



TYSTOR AB  
Nilsbol • S-64295 Flen • SWEDEN  
Phone +46(0)157 70450 Fax +46(0)157 70454  
[www.tystor.com](http://www.tystor.com) [sales@tystor.com](mailto:sales@tystor.com)

WP\_0832\_eng



Made in Sweden !

## The unique watertight charger !

### TYSTOR AB

have the pleasure to present a new series of chargers designed for vehicles, industry, telecom, UPS, wheelchairs, forklifts, marin , aero and sweepers

### TYSTOR WP-series



Also available in Ni-CD ,  
Ni-MH and Li-Ion versions!

- Approved according to the medical standards IEC-60101
- Safety certified and fulfill the RoHS directive
- Shortcircuit and wrong polarity proof - no fuse burns
- Waterproof




turn page and find out all other advantages !

We reserve the right to alter the technical data without prior notice.

# 24 argument making TYSTOR WP unbeatable !

**Also available in Ni-CD ,  
Ni-MH and Li-Ion versions!**

**Updated version !  
New Safetyfunction prevent  
Mode-change by mistake.**

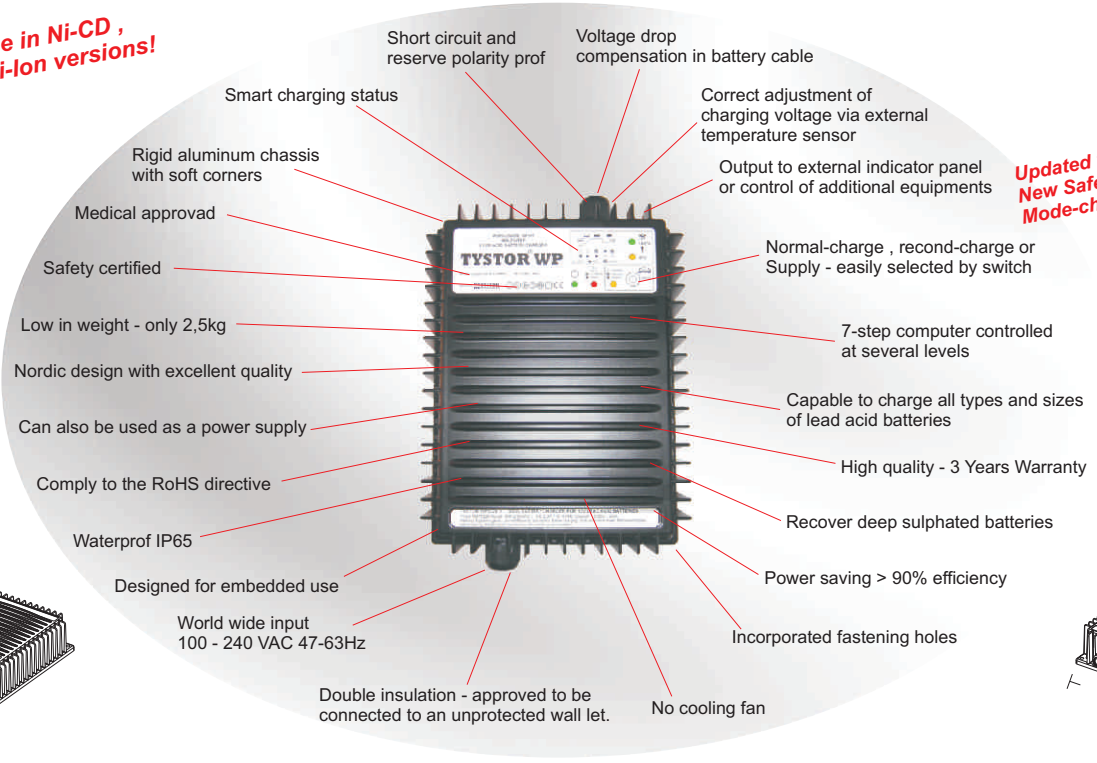

Technical data TYSTOR WP1220	
Input	100-240VAC 47-63Hz
System voltage	12V
Charging voltage, max	15,0V (program specific)
Charging voltage, standby	13,8V (program specific)
Max charging current	20A
Rated power	300W
Consumption	1mA
Length / Width / Height	See picture
Weight with cables	2,5kg
Art. no	290-006

Technical data TYSTOR WP1810	
Input	100-240VAC 47-63Hz
System voltage	18V
Charging voltage, max	22,0V (program specific)
Charging voltage, standby	20,7V (program specific)
Max charging current	10A
Rated power	300W
Consumption	1mA
Length / Width / Height	See picture
Weight with cables	2,5kg
Art. no	290-008

**New !**

Technical data TYSTOR WP2410	
Input	100-240VAC 47-63Hz
System voltage	24V
Charging voltage, max	30,0V (program specific)
Charging voltage, standby	27,6V (program specific)
Max charging current	10A
Rated power	300W
Consumption	1mA
Length / Width / Height	See picture
Weight with cables	2,5kg
Art. no	290-007