INVERTERS 55-80 serie

DC-DC omvandlare för blybatteri laddning

DC-DC inverters for lead acid battery charge

55/80W

- Skyddad mot omkastad polaritet och överspänning (transorb diod mot transienter). Automatisk urkoppling v/spänningar över eller under det specifierade området. Säkring på ingången.
- Termisk säkrad, kortslutningssäker och överspänningsskyddad (utgång)
- In- och utgång är galvanisk skild från chassit. Ingången är galvanisk skild från utgången.
- 6,3 mm flatstiftkontakter (ingång och utgång)

- *Protected against reversed polarity and overvoltage (transorb diode against transients). Switches off automatically at input voltages over or under the specified range. Fuse at input.*
- *Thermal protection, short circuit proof and overvoltage protection (output)*
- *Input and output are electrically separated from chassis. The input is electrically separated from output.*
- *6,3 mm push-on terminals (input and output)*

TYSTOR BATTERYCHARGERS

Tystor AB • Nilsbol • S-64295 Flen • Sweden
Tel: +46 (0)157 70450 • Fax:+46 (0)157 70454
www.tystor.com • sales@tystor.com

TEKNISKA DATA / *TECHNICAL DATA*

Inspänning / *Input Voltage*	se tabell/ *see table*	**V**
Utspänning / *Output Voltage*	se tabell/ *see table*	**V**
Utström cont / *Output current cont*	se tabell/ *see table*	**A**
Utström topp / *Output current peak*	se tabell/ *see table*	**A**
Max uteffekt kont. / *Max. output power cont.*	55/80	**W**
Max uteffekt topp / *Max. output power peak.*	70/130	**W**
Egenförbrukning ingen last /*Consumption no load*	90	**mA**
Verkningsgrad / *Efficiency*	>85	**%**
EMC standards / *EMC standards*	EN 50081-1/50082-1	
Höjd/*Height*	46	**mm**
Bredd/*Width*	119	**mm**
Längd/*Length*	135	**mm**
Vikt /*Weight*	0,6	**kg**
Artikelnummer */ Art.no*	se tabell/ *see table*	

Artikel nummer **Article number**	**Inspänning** ***Input Voltage***	**Utspänning** ***Output voltage***	**Utström cont.** ***Output current cont.***	**Utström topp** ***Output current peak***
400-001	18-32 V	27,6 V	3A	4A
400-002	18-32 V	13,8 V	6A	8A
400-003	40-64 V	13,8 V	6A	8A
400-004	40-64 V	27,6 V	3A	4A
400-007	10-16 V	27,6 V	2A	2,5A
400-008	72-110 V	13,8 V	6A	8A
400-009	18-32 V	55,2 V	1,5A	2A
400-010	10-16V	13,8V	3A	4A
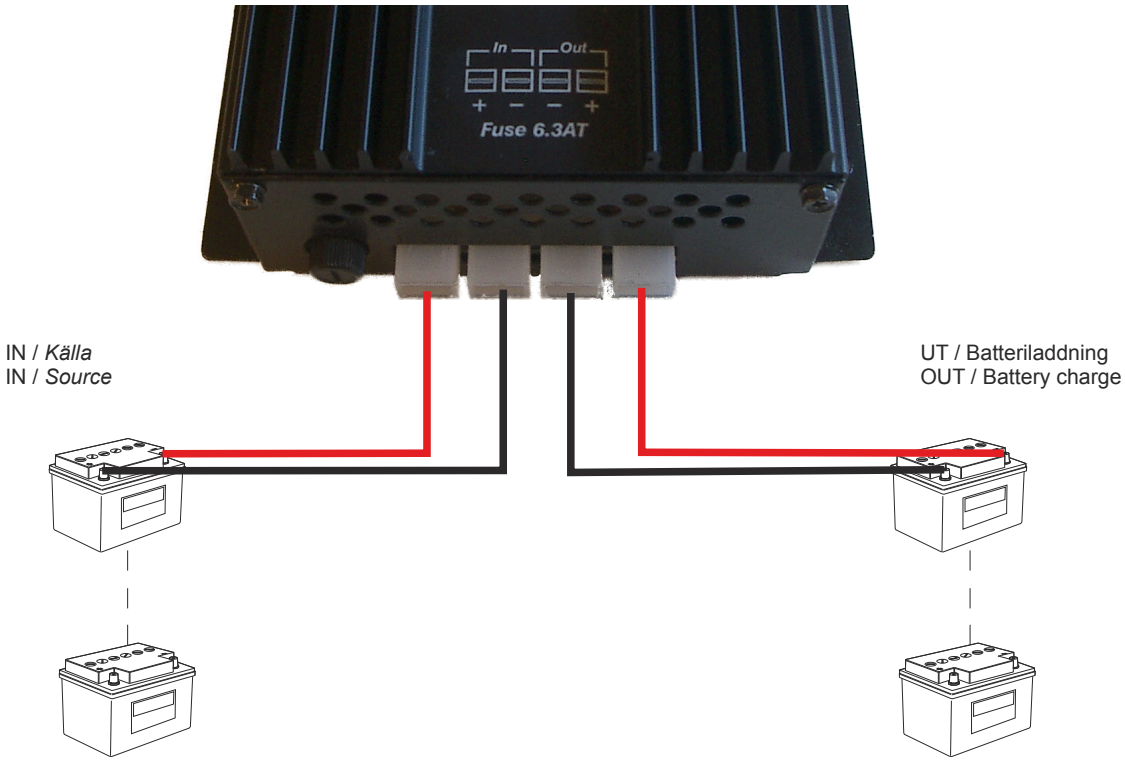
Typinstallation / *Typical installation*